


DURA FLUE

TOTAL CHIMNEY SOLUTIONS

DIRECTION OF FLOW

ALWAYS INSTALL THE FLEXIBLE LINER WITH THE GREEN END ORIENTATED TOWARD THE DIRECTION OF FLOW, I.E IN THE DIRECTION OF THE TERMINAL.

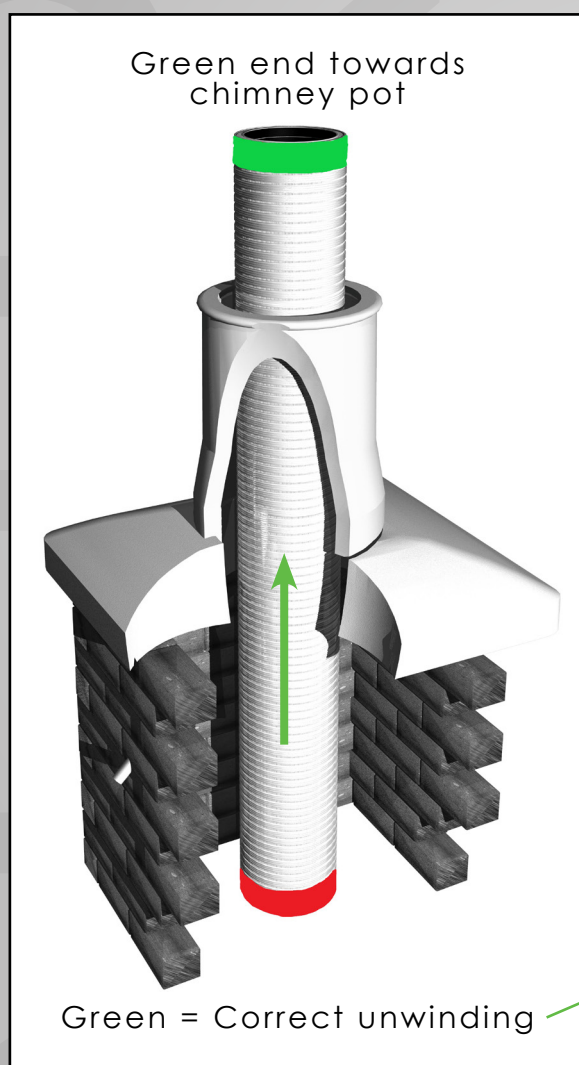

FLOW DIRECTION ARROWS ARE ALSO PRINTED AT 1.5M INTERVALS ON THE SURFACE OF THE FLEXIBLE LINER. REMOVE RED AND GREEN TAPE PRIOR TO INSTALLATION OF FITTING.



SALES@FLUE-DUCTING.CO.UK



0161 480 2994



WWW.FLUE-DUCTING.CO.UK